# 2 / 4-Port USB 2.0 Auto Sharing Switch

## Share any USB 2.0 device between 2 / 4 computers

### Features

- Enable two PCs and/or Macs to share any USB device such as scanners, printers, external hard drives, MP3 players & more
- Fully compliant with USB 2.0 specification with data transfer rate up to 480 Mbps
- Backward compatible with USB 1.1 specification
- Manual computer selection through pushbutton
- Easy AOD (Access-On-Demand) switching software (Windows only)
- Supports idle time-out switching and automatic print sharing
- Bus Powered – No external power supply needed
- Plug-n-Play, Hot swappable, and Hot pluggable
- Limited 1 Year warranty

Aluratek

digital technology made fun

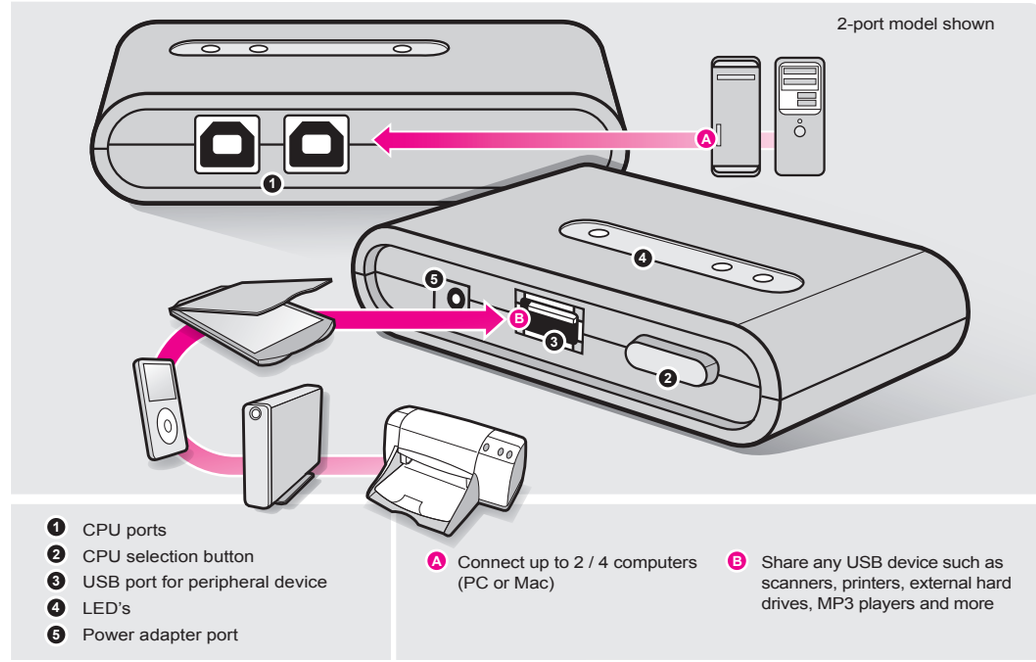


1. CPU ports
2. CPU selection button
3. USB port for peripheral device
4. LED's
5. Power adapter port

A. Connect up to 2 / 4 computers (PC or Mac)

B. Share any USB device such as scanners, printers, external hard drives, MP3 players and more

### Specifications

| | |
|---|---|
| Cable | (2) x USB (A to B) Cable |
| CPU Connectors | (2 / 4) x USB Type-B |
| Housing | Plastic |
| LED's | (3 / 5) x Blue |
| Operating Humidity | 10% to 85%, non-condensing |
| Operating Temperature | 0°C~40°C (32°F~104°F) |
| Port Selection | Pushbutton or Access-On-Demand (Windows only) |
| Power Adapter | Bus powered, no external power needed |
| Storage Humidity | 5% to 90%, non-condensing |
| Storage Temperature | -20°C~60°C (-4°F~140°F) |
| USB Device Connector | (1) x USB Type-A |
| Unit Dimensions (L x W x H) | 3.78 in. (9.6 cm), 2.24 in. (5.7 cm), 0.87 in. (2.2 cm) |
| Unit Weight | 2.7 oz. (0.075 kg) |
| USB Specification | USB 1.1 and 2.0 compliant |

### Requirements

- Windows 98SE, 2000, ME, XP & Vista
- Mac OS X v10.3.9 or later
- Available USB port

### Package Contents

- 2-Port USB 2.0 Auto Sharing Switch
- USB 2.0 (A to B) Cable (6 ft.)
- USB 2.0 (A to B) Cable (3 ft.)
- Installation CD
- Quick Start Guide
- Warranty / Registration Card

1 year warranty · mac · win · usb 2.0 hi-speed